



Field Machine Tools Pty Ltd

ABN 48 097 691 748
1/26 Shearson Crescent
Mentone VIC 3194

www.fmt.com.au sales@fmt.com.au
Ph: 1300 FMT FMT Fx: 03 9585 7355
International
Ph: 617 3267 6844 Fx: 617 3267 8244




LR-200

Specifications

2" Bar Drive w/ self aligning clamp
Quick attach hydraulic drive motor
Axial feed unit with 350 mm travel
Variable feed from 0.007 to 0.3mm per rev
Bi-directional bar feed standard
2" x 8' bar with tool holes on 6" spacing
Offset drive mount
3 only offset bar support bearing
Boring head 175-250
Boring head 250-300
2 only Alignment chucks 70-200
3.7 Kw portable hydraulic power unit
24 Volt pendant On/Off control
6m hoses with quick release couplings
Control valve
Steel shipping locker (machine)

*Specifications subject to change without notice.

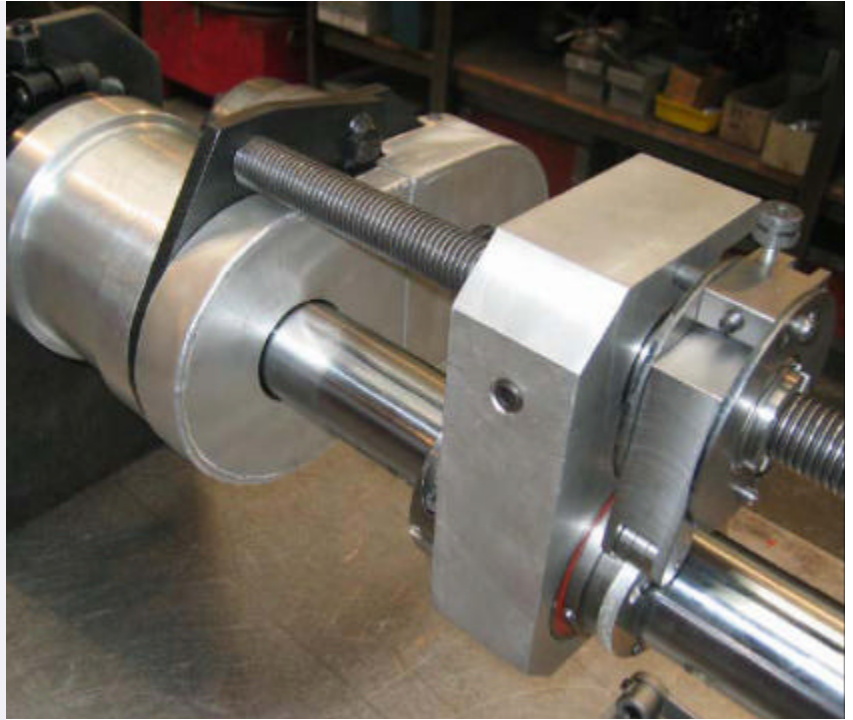

Description

The LR-200 portable Line Boring system is small lightweight and simple to operate without compromising performance or rigidity. Portable line boring systems rely on rigidity for repetition and surface finish. To achieve this, the LR-200 uses precision bearings, close tolerance bars and a zero backlash drive chain. The modular design means that the LR-200 is smaller and lighter than other systems and can be easily mounted in restricted spaces. The LR-200 can be set up faster by using self-aligning bearings and an adjustable mounting system. The gear drive system is designed for large diameter torque loads, but is also capable of fast bar speeds with less power input. The LR-200 is supplied with a 50.8 mm dia boring bar 2430 mm long. Alternate length bars are available along with a range of accessories that include, Facing Head, Bar Coupler, Over Bar Micrometer, Micro Adjuster Tool, Thru Bar Micrometer and automatic ID welding systems.

Pricing

	Day	Week	Month
Rental			
Purchase			

MELBOURNE BRISBANE PERTH NEWCASTLE ADELAIDE DARWIN